



## Features

The hand-held zc-ir-ctrl remote is fitted with 24 buttons that provides basic luminaire programming functions. This includes 16 pre-configured features and up to eight custom programmable features.



### Dimming

Adjustable brightness in steps or smaller increments



### Colour temperature

Adjustable cool white to warm white colour control



### Scenes

Set 1 - 8 scenes



### Customisation

Set 1 - 8 custom settings




## Product range

Order code	Description
zc-ir-ctrl	Hand-held infrared control unit

### Features

- 24 buttons
- 1 - 8 scene control
- Dimming control
- Colour temperature control
- 1 - 8 Custom configuration buttons

## Dimensions (mm)

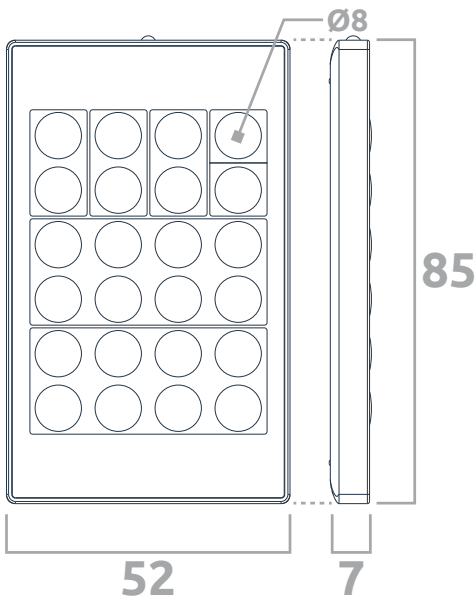

## Specifications

Type	Infrared
IR frequency	38 kHz
Operating range	≈ 5 m
Buttons	24
Material	PC
Battery	CR2025 Lithium coin-cell

## Functions

Symbol	Function	Description
	<b>On</b>	Switches the luminaire on
	<b>Off</b>	Switches the luminaire off
	<b>Dim up/down</b>	Dims the luminaire up/down for 200ms
	<b>Step up/down</b>	Steps the luminaire up/down
	<b>Cooler</b>	Steps the colour temperature cooler
	<b>Warmer</b>	Steps the colour temperature warmer
	<b>Scenes</b>	Recall scenes 1 - 8
	<b>Custom</b>	Custom configuration buttons 1 - 8

## Supported models

Order code	Description
zc-pir-8m-p	8 m, PIR and lux sensor, with IR expansion kit for zc-smart-driver
zc-pir-nano-p	5 m, PIR and lux sensor, with IR expansion kit for zc-smart-driver, nano form factor
zc-mw-p	Microwave and lux sensor, with IR expansion kit for zc-smart-driver

For use with zc-smart-driver range